



# ABOUT LEIBINGER

## Trusted partner

Companies from all industries rely on LEIBINGER every day.

## Family-owned

Supporting the same values that Paul Leibinger set out in 1948.

## Made in Germany

100% precision-engineered at our factory in Tuttlingen.

## Disruptive innovation

We're constantly improving and innovating to make our customers more productive.

## Sustainability

Solid reliability, fair maintenance and ultra-low power and solvents consumption.

## Global presence

Wherever you are in the world, LEIBINGER and our 150 partners are there for you.

## Unique technology = Your benefits

1

### Highest productivity

LEIBINGER's **fully automatic nozzle sealing technology** is unique in the market. It completely prevents clogging and eliminates the need for time-consuming cleaning by sealing ink in an airtight circuit during printing breaks. This guarantees seamless start & stop functionality and high quality printing at any time — no interruptions, and no downtime.

2

### High-precision, ultra-reliable marking

The LEIBINGER brand stands for **unmatched reliability and sustainability**. Our German-engineered printers are crafted to perfection and trusted globally. With 85% in-house production, we ensure maximum quality control. Recognized worldwide as true plug & print solutions, LEIBINGER printers operate seamlessly, providing 100% peace of mind — a testament to our commitment to your success.

3

### Lowest costs and maintenance effort

LEIBINGER's state-of-the-art CIJ printers have the **lowest Total Cost of Ownership (TCO)** offering optimized consumables and power consumption, and minimum maintenance. Unlike other printer providers, we focus on replacing only necessary spare parts, avoiding the need to replace entire ink core modules.





# JET3 ECO Details

Print lines  
≡ 5

Speed up to  
⌚ 403 m/min

Print raster  
↕ 32 dots

## Technical details



- » LEIBINGER's unique nozzle sealing technology
- » Inks: dye-based, soft pigmented, heavy pigmented, food-grade ink, food packaging inks
- » Nozzle sizes: 60µm, 70µm
- » IP rating: IP 54, IP 65 (Option)
- » Interfaces: USB, Ethernet, I/O signals (9/8), serial interface RS232
- » Touch screen display: 10.4"

## Environmental conditions

- » 100 V-240 V, 50-60 Hz, max. 40 VA
- » Temperature +5°C to +45°C
- » Relative humidity max. 90%, non-condensing
- » No external air pressure necessary (except for IP 65 option)

## Dimensions

Umbilical length: 3 m



# JET3 ECO printer line

Efficient and affordable – the perfect combination



Cost-Effective CIJ solution



Engineered for high-contrast inks



Dustproof and waterproof expert

Print on any material and on any shape



Bio-foil



Carton



Ceramic



Film



Foil



Glass



Metal



Plastic



Rubber



Wire




Wood

”

We would put a  
LEIBINGER on and it  
would work straight  
out of the box.

*Gary Fogg, Head of  
Production, Four  
Peaks Brewery,  
USA*

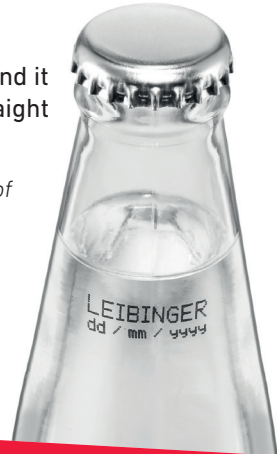

“

LEIBINGER inkjet printers are easy to use and require less maintenance than other brands. I also appreciate the distributor's quick support. Overall, I'm very happy with their printing performance in our water filling machines.

*Mohammad Ibnu Affan, Factory Manager, PT Sariguna Primatirta (Cleo Waters), Indonesia*

Get in contact with:

**LEIBINGER experts:**

[info@leibinger-group.com](mailto:info@leibinger-group.com)

[leibinger-group.com](http://leibinger-group.com)